

Apache CloudStack 4.1.0

CloudStack Plugin Guide
for the Nicira NVP Plugin



Apache CloudStack

Apache CloudStack 4.1.0 CloudStack Plugin Guide for the Nicira NVP Plugin

Author

Apache CloudStack

Licensed to the Apache Software Foundation (ASF) under one or more contributor license agreements. See the NOTICE file distributed with this work for additional information regarding copyright ownership. The ASF licenses this file to you under the Apache License, Version 2.0 (the "License"); you may not use this file except in compliance with the License. You may obtain a copy of the License at

<http://www.apache.org/licenses/LICENSE-2.0>

Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

Apache CloudStack is an effort undergoing incubation at The Apache Software Foundation (ASF).

Incubation is required of all newly accepted projects until a further review indicates that the infrastructure, communications, and decision making process have stabilized in a manner consistent with other successful ASF projects. While incubation status is not necessarily a reflection of the completeness or stability of the code, it does indicate that the project has yet to be fully endorsed by the ASF.

Plugin Guide for the Nicira NVP Plugin.

1. The Nicira NVP Plugin	1
1.1. Introduction to the Nicira NVP Plugin	1
1.2. Features of the Nicira NVP Plugin	1
2. Configuring the Nicira NVP Plugin	3
2.1. Prerequisites	3
2.2. Zone Configuration	3
2.3. Enabling the service provider	4
2.4. Device Management	4
2.5. Network Offerings	5
3. Using the Nicira NVP plugin with VPC	9
3.1. Supported VPC features	9
3.2. VPC Offering with Nicira NVP	9
3.3. VPC Network Offerings	10
4. Troubleshooting the Nicira NVP Plugin	11
4.1. UUID References	11
4.2. Database tables	11
A. Revision History	13

The Nicira NVP Plugin

1.1. Introduction to the Nicira NVP Plugin

The Nicira NVP plugin adds Nicira NVP as one of the available SDN implementations in CloudStack. With the plugin an existing Nicira NVP setup can be used by CloudStack to implement isolated guest networks and to provide additional services like routing and NAT.

1.2. Features of the Nicira NVP Plugin

The following table lists the CloudStack network services provided by the Nicira NVP Plugin.

표 1.1. Supported Services

Network Service	CloudStack version	NVP version
Virtual Networking	>= 4.0	>= 2.2.1
Source NAT	>= 4.1	>= 3.0.1
Static NAT	>= 4.1	>= 3.0.1
Port Forwarding	>= 4.1	>= 3.0.1



참고

The Virtual Networking service was originally called 'Connectivity' in CloudStack 4.0

The following hypervisors are supported by the Nicira NVP Plugin.

표 1.2. Supported Hypervisors

Hypervisor	CloudStack version
XenServer	>= 4.0
KVM	>= 4.1



참고

Please refer to the Nicira NVP configuration guide on how to prepare the hypervisors for Nicira NVP integration.

Configuring the Nicira NVP Plugin

2.1. Prerequisites

Before enabling the Nicira NVP plugin the NVP Controller needs to be configured. Please review the NVP User Guide on how to do that.

Make sure you have the following information ready:

- The IP address of the NVP Controller
- The username to access the API
- The password to access the API
- The UUID of the Transport Zone that contains the hypervisors in this Zone
- The UUID of the Gateway Service used to provide router and NAT services.



참고

The gateway service uuid is optional and is used for Layer 3 services only (SourceNat, StaticNat and PortForwarding)


2.2. Zone Configuration

CloudStack needs to have at least one physical network with the isolation method set to "STT". This network should be enabled for the Guest traffic type.



참고

The Guest traffic type should be configured with the traffic label that matches the name of the Integration Bridge on the hypervisor. See the Nicira NVP User Guide for more details on how to set this up in XenServer or KVM.

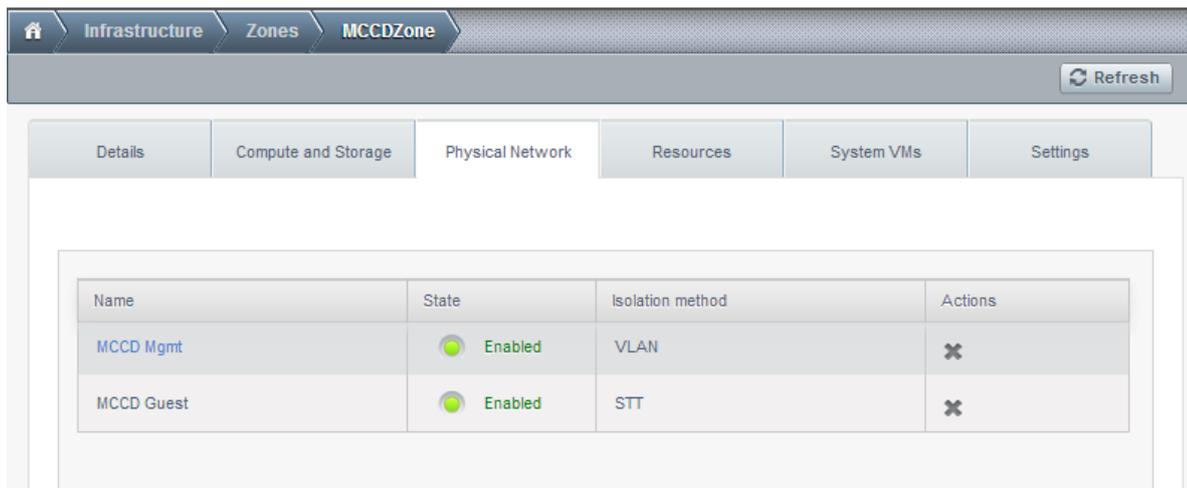


2.3. Enabling the service provider

The Nicira NVP provider is disabled by default. Navigate to the "Network Service Providers" configuration of the physical network with the STT isolation type. Navigate to the Nicira NVP provider and press the "Enable Provider" button.



참고


CloudStack 4.0 does not have the UI interface to configure the Nicira NVP plugin. Configuration needs to be done using the API directly.

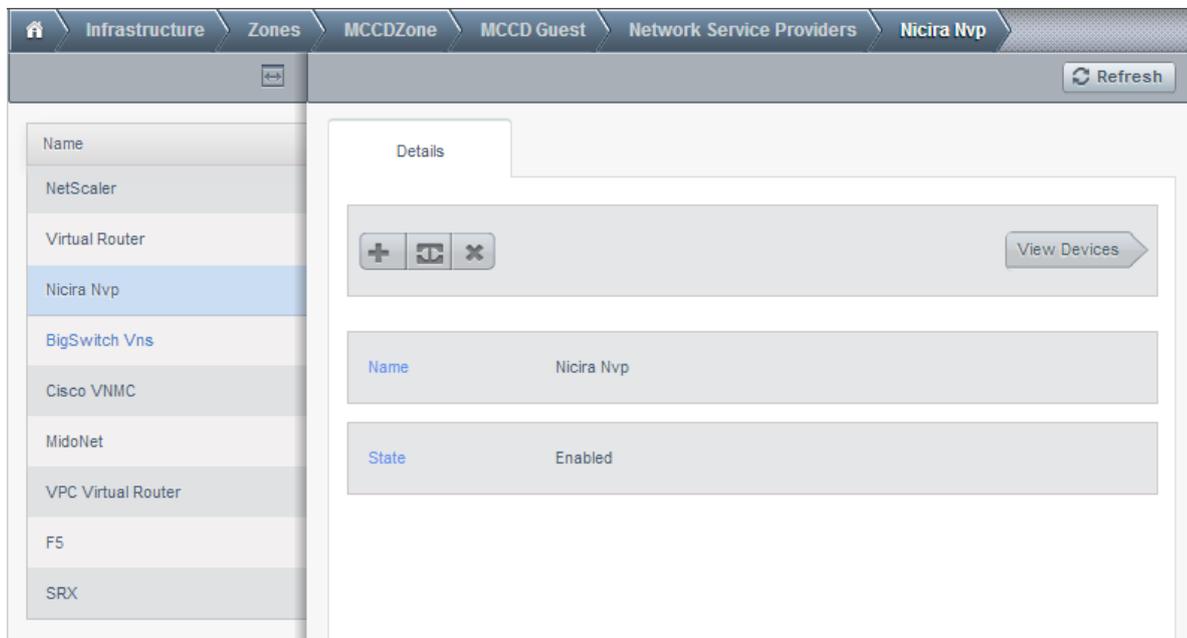

2.4. Device Management

In CloudStack a Nicira NVP setup is considered a "device" that can be added and removed from a physical network. To complete the configuration of the Nicira NVP plugin a device needs to be added

to the physical network. Press the "Add NVP Controller" button on the provider panel and enter the configuration details.

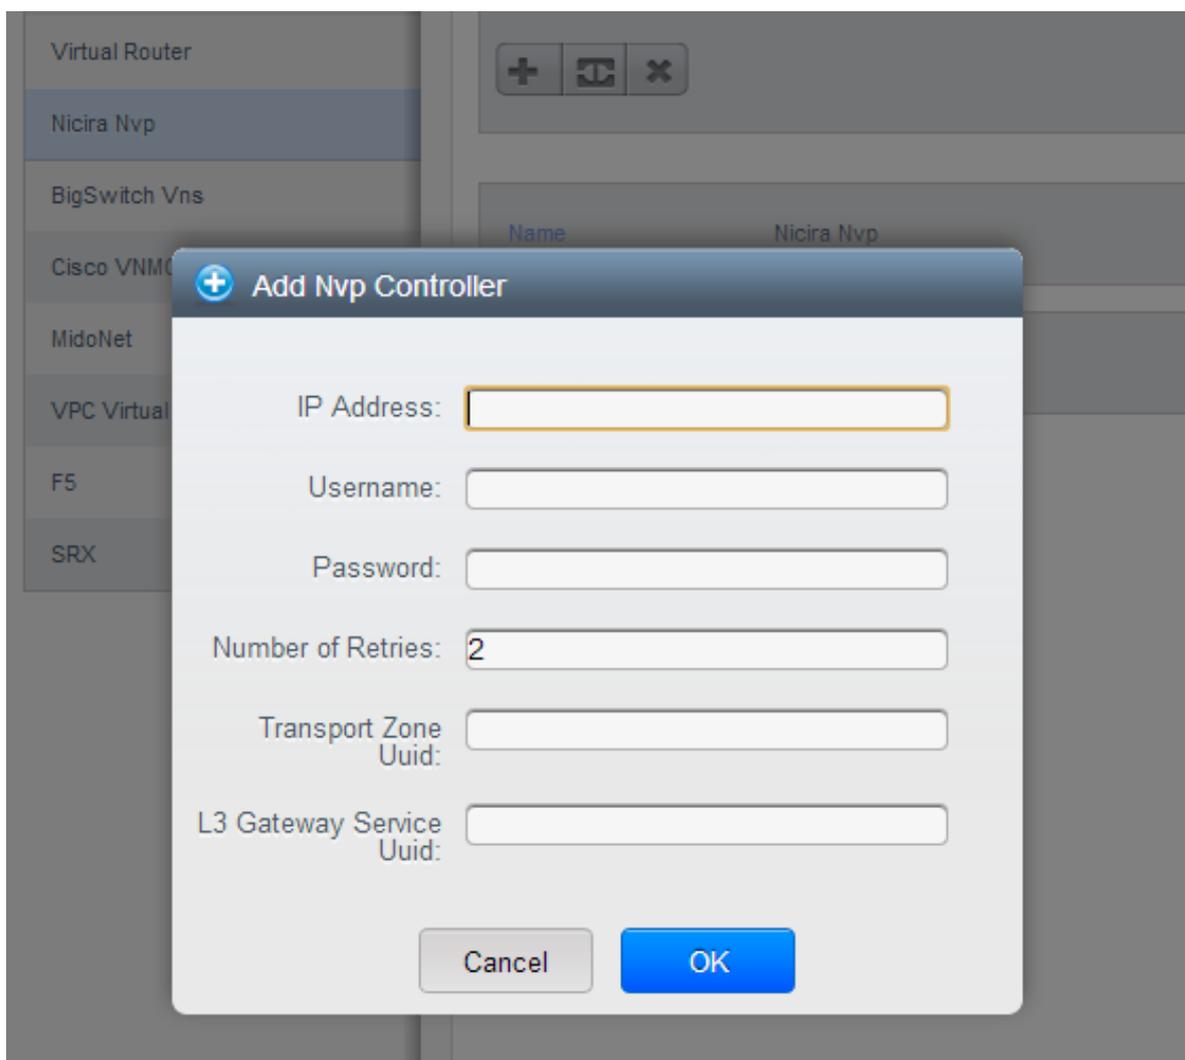


2.5. Network Offerings

Using the Nicira NVP plugin requires a network offering with Virtual Networking enabled and configured to use the NiciraNvp element. Typical use cases combine services from the Virtual Router appliance and the Nicira NVP plugin.

2.5.1. Isolated network offering with regular services from the Virtual Router.

Service	Provider
VPN	VirtualRouter
DHCP	VirtualRouter
DNS	VirtualRouter
Firewall	VirtualRouter
Load Balancer	VirtualRouter
User Data	VirtualRouter
Source NAT	VirtualRouter
Static NAT	VirtualRouter

Service	Provider
Post Forwarding	VirtualRouter
Virtual Networking	NiciraNVP

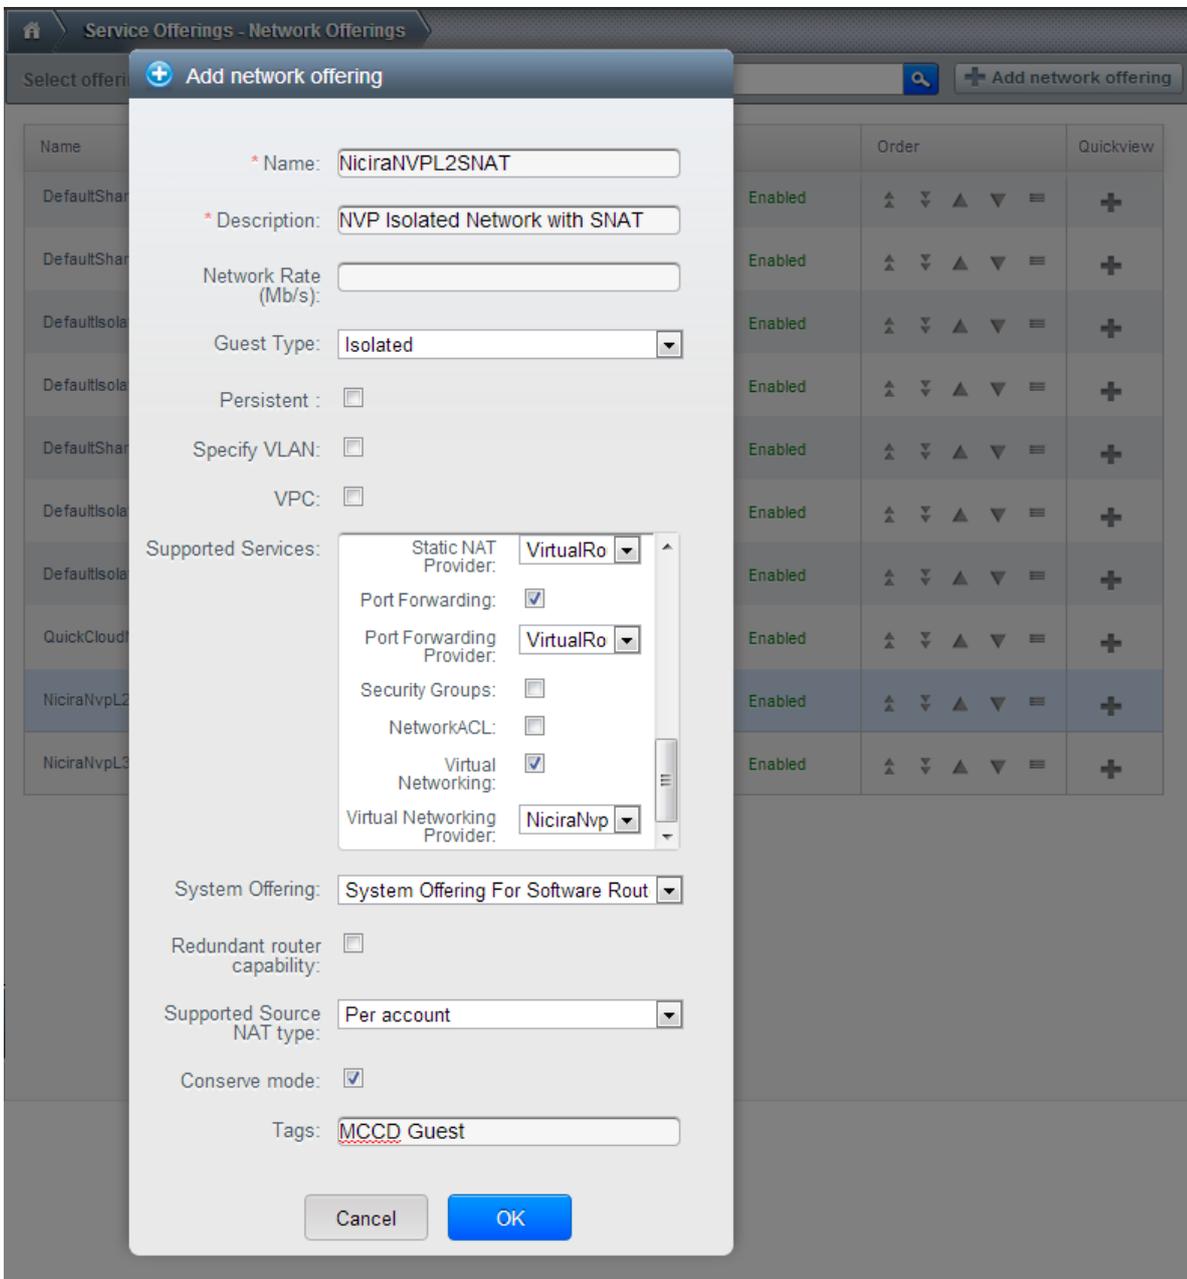

참고

The tag in the network offering should be set to the name of the physical network with the NVP provider.

Isolated network with network services. The virtual router is still required to provide network services like dns and dhcp.

표 2.2. Isolated network offering with network services

Service	Provider
DHCP	VirtualRouter
DNS	VirtualRouter
User Data	VirtualRouter
Source NAT	NiciraNVP
Static NAT	NiciraNVP
Post Forwarding	NiciraNVP
Virtual Networking	NiciraNVP

Using the Nicira NVP plugin with VPC

3.1. Supported VPC features

The Nicira NVP plugin supports CloudStack VPC to a certain extent. Starting with CloudStack version 4.1 VPCs can be deployed using NVP isolated networks.

It is not possible to use a Nicira NVP Logical Router for as a VPC Router

It is not possible to connect a private gateway using a Nicira NVP Logical Switch

3.2. VPC Offering with Nicira NVP

To allow a VPC to use the Nicira NVP plugin to provision networks, a new VPC offering needs to be created which allows the Virtual Networking service to be implemented by NiciraNVP.

This is not currently possible with the UI. The API does provide the proper calls to create a VPC offering with Virtual Networking enabled. However due to a limitation in the 4.1 API it is not possible to select the provider for this network service. To configure the VPC offering with the NiciraNVP provider edit the database table 'vpc_offering_service_map' and change the provider to NiciraNvp for the service 'Connectivity'

It is also possible to update the default VPC offering by adding a row to the 'vpc_offering_service_map' with service 'Connectivity' and provider 'NiciraNvp'

The screenshot shows a database query interface with the following SQL query: `SELECT * FROM cloud.vpc_offering_service_map;`

The query results are displayed in a table with the following columns: id, vpc_offering_id, service, provider, and created. The table contains 13 rows of data, with the last row having NULL values for all columns except for the asterisk in the first column.

	id	vpc_offering_id	service	provider	created
▶	1	1	Gateway	VpcVirtualRouter	2012-10-25 13:46:20
	3	1	StaticNat	VpcVirtualRouter	2012-10-25 13:46:20
	5	1	Dhcp	VpcVirtualRouter	2012-10-25 13:46:20
	7	1	NetworkACL	VpcVirtualRouter	2012-10-25 13:46:20
	9	1	Vpn	VpcVirtualRouter	2012-10-25 13:46:20
	11	1	Dns	VpcVirtualRouter	2012-10-25 13:46:20
	13	1	SourceNat	VpcVirtualRouter	2012-10-25 13:46:20
	15	1	Lb	VpcVirtualRouter	2012-10-25 13:46:20
	17	1	PortForwarding	VpcVirtualRouter	2012-10-25 13:46:20
	19	1	UserData	VpcVirtualRouter	2012-10-25 13:46:20
	21	1	Connectivity	NiciraNvp	2013-03-01 21:40:01
*	NULL	NULL	NULL	NULL	NULL



참고

When creating a new VPC offering please note that the UI does not allow you to select a VPC offering yet. The VPC needs to be created using the API with the offering UUID.

3.3. VPC Network Offerings

The VPC needs specific network offerings with the VPC flag enabled. Otherwise these network offerings are identical to regular network offerings. To allow VPC networks with a Nicira NVP isolated network the offerings need to support the Virtual Networking service with the NiciraNVP provider.

In a typical configuration two network offerings need to be created. One with the loadbalancing service enabled and one without loadbalancing.

표 3.1. VPC Network Offering with Loadbalancing

Service	Provider
VPN	VpcVirtualRouter
DHCP	VpcVirtualRouter
DNS	VpcVirtualRouter
Load Balancer	VpcVirtualRouter
User Data	VpcVirtualRouter
Source NAT	VpcVirtualRouter
Static NAT	VpcVirtualRouter
Post Forwarding	VpcVirtualRouter
NetworkACL	VpcVirtualRouter
Virtual Networking	NiciraNVP

Troubleshooting the Nicira NVP Plugin

4.1. UUID References

The plugin maintains several references in the CloudStack database to items created on the NVP Controller.

Every guest network that is created will have its broadcast type set to Lswitch and if the network is in state "Implemented", the broadcast URI will have the UUID of the Logical Switch that was created for this network on the NVP Controller.

The Nics that are connected to one of the Logical Switches will have their Logical Switch Port UUID listed in the `nicira_nvp_nic_map` table



참고

All devices created on the NVP Controller will have a tag set to domain-account of the owner of the network, this string can be used to search for items in the NVP Controller.

4.2. Database tables

The following tables are added to the cloud database for the Nicira NVP Plugin

표 4.1. `nicira_nvp_nic_map`

id	auto incrementing id
logicalswitch	uuid of the logical switch this port is connected to
logicalswitchport	uuid of the logical switch port for this nic
nic	the CloudStack uuid for this nic, reference to the nics table

표 4.2. `external_nicira_nvp_devices`

id	auto incrementing id
uuid	UUID identifying this device
physical_network_id	the physical network this device is configured on
provider_name	NiciraNVP
device_name	display name for this device
host_id	reference to the host table with the device configuration

표 4.3. `nicira_nvp_router_map`

id	auto incrementing id
logicalrouter_uuid	uuid of the logical router
network_id	id of the network this router is linked to



참고

`nicira_nvp_router_map` is only available in CloudStack 4.1 and above

부록 A. Revision History

고침 0-0 Wed Oct 03 2012 Hugo Trippaers hugo@apache.org
Documentation created for 4.0.0-incubating version of the NVP Plugin

고침 1-0 Wed May 22 2013 Hugo Trippaers hugo@apache.org
Documentation updated for CloudStack 4.1.0

